

CURRENT TRANSFORMERS

Window Diameter 3.7" x 4.7"

Model: RT3747TS

Fully encapsulated.
Indoor/outdoor applications.

Standard 5-amp secondary.
Others available.

APPLICATION:

For Ammeters, Watthour Meters, Wattmeters.



CONTINUOUS THERMAL RATING:

1.33 at 30 C. amb.; 1.0 at 55 C. amb., Average.

INSULATION CLASS:

0.6 kV. BIL 10kV. full wave.

50-400 Hz.

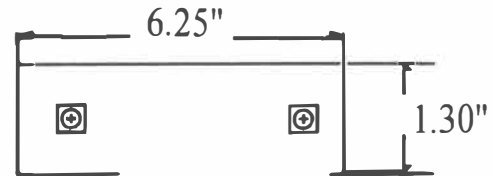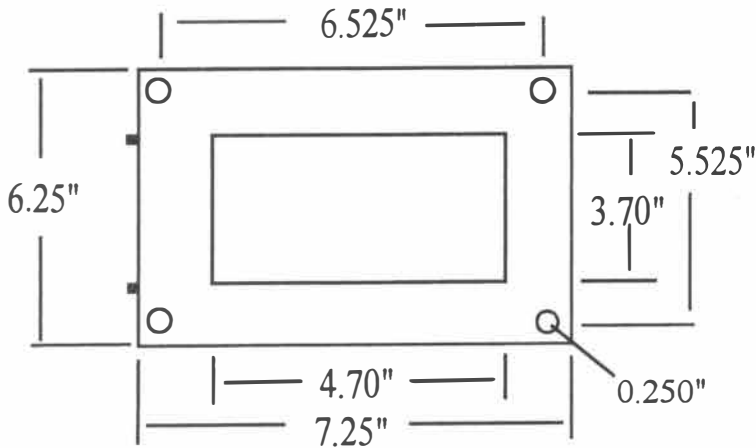

RT3747TS-**

CATALOG NUMBER	CURRENT RATIO AMPERES	V.A. FOR +/- 1% CLASS	ANSI METERING CLASS AT 60 Hz				
			BO.1	BO.2	BO.5	BO.9	B1.8
**_300	300:5	15.0	1.2	1.2	1.2	2.4	-
**_400	400:5	25.0	0.6	1.2	2.4	2.4	-
**_500	500:5	35.0	0.6	0.6	1.2	2.4	-
**_600	600:5	50.0	0.6	0.6	1.2	1.2	2.4
**_750	750:5	50.0	0.3	0.6	0.6	1.2	2.4
**_800	800:5	60.0	0.3	0.6	0.6	1.2	1.2
**_1000	1000:5	75.0	0.3	0.3	0.6	0.6	1.2
**_1200	1200:5	75.0	0.3	0.3	0.3	0.6	0.6
**_1500	1500:5	90.0	0.3	0.3	0.3	0.6	0.6
**_1600	1600:5	100.0	0.3	0.3	0.3	0.6	0.6
**_2000	2000:5	100.0	0.3	0.3	0.3	0.3	0.6
**_2500	2500:5	100.0	0.3	0.3	0.3	0.3	0.3
**_3000	3000:5	120.0	0.3	0.3	0.3	0.3	0.3
**_3500	3500:5	120.0	0.3	0.3	0.3	0.3	0.3
**_4000	4000:5	120.0	0.3	0.3	0.3	0.3	0.3

- Terminals are brass No. 10-32 UNC.
- Approximate weight 5 lbs.
- Additional ratios available.

NOTE: 2400:5 and up has an Rf. of 1 @ 30 C. amb.



5001 Baum Blvd., Pittsburgh, PA 15213
info@ayainstruments.com | 412.622.5500

Made in the United States of America

Similar to ITI models 567