



3 PHASE CURRENT TRANSFORMER

Model 3P60, 3P61 AND 3P62 (TO : 1 RATIO)

Application: 3 Phase Relay, Metering and Motor Overload


Frequency: 50-400Hz

Insulation Levels: 600 Volts, 10kv BIL Full Wave

- Flexible leads available for all case configurations. Flexible leads are UL 1015 105 Deg. C, C.S.A. approved #10 AWG, 48" long standard length. Non-standard lengths are available upon request.



Part Number	Ratio	B0.1	B0.2	B0.5	B0.9	B1.0	B1.8	Secondary Winding Resistance (Ohms @ 75 Deg. C)
3P60-101-1	100:1	0.6	1.2	1.2	1.2	1.2	2.4	0.775
3P60-121-1	120:1	0.6	0.6	1.2	1.2	1.2	2.4	0.933
3P61-151-1	150:1	0.3	0.6	0.6	1.2	1.2	1.2	1.067
3P61-201-1	200:1	0.3	0.3	0.3	0.3	0.6	1.2	2.337
3P61-251-1	250:1	0.3	0.3	0.3	0.3	0.3	0.6	2.861
3P62-301-1	300:1	0.3	0.3	0.3	0.3	0.3	0.3	3.244
3P62-401-1	400:1	0.3	0.3	0.3	0.3	0.3	0.3	4.348
3P62-501-1	500:1	0.3	0.3	0.3	0.3	0.3	0.3	5.452
3P61-601-1	600:1	0.3	0.3	0.3	0.3	0.3	0.3	6.937
3P61-751-1	750:1	0.3	0.3	0.3	0.3	0.3	0.3	10.447
3P61-801-1	800:1	0.3	0.3	0.3	0.3	0.3	0.3	9.185
3P61-102-1	1000:1	0.3	0.3	0.3	0.3	0.3	0.3	11.537

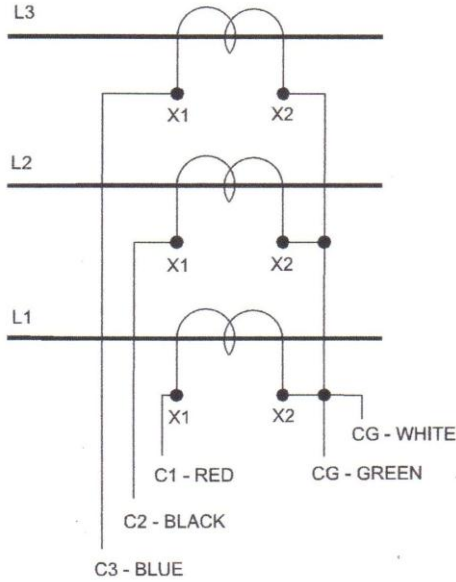

Part Number	Window Size	Ratio
3P60-101-1	1.25	100:1
3P61-151-1	2.00	150:1
3P61-201-1	2.00	200:1
3P61-251-1	2.00	250:1
3P62-301-1	2.50	300:1
3P62-401-1	2.50	400:1
3P62-501-1	2.50	500:1
3P61-601-1	2.00	600:1
3P61-801-1	2.00	800:1
3P61-102-1	2.00	1000:1

